

MBR30U100CT/FCT


Low Trench Mos Barrier Schottky Rectifier

Voltage	100 Volts	Current	30 Amperes
---------	-----------	---------	------------

Features

Low Forward Voltage Drop
Excellent High Temperature Stability
Patented Super Barrier Rectifier Technology
Soft, Fast Switching Capability

DRAWING

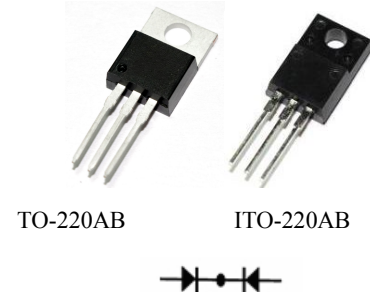

Mechanical Data

Case: TO-220AB, ITO-220AB
Case Material: Molded Plastic, UL Flammability Classification Rating 94V-0
Terminals: Matte Tin Finish annealed over Copper leadframe. Solderable per MIL-STD-202, Method 208
Weight: TO-220AB – 1.85 grams (approximate)
ITO-220AB – 1.65 grams (approximate)

Typical Applications

Power Supply – Output Rectification
Power Management
Instrumentation

Maximum Ratings (Per Leg) ($T_A = +25^\circ\text{C}$, unless otherwise specified.)

Parameter	Symbol	MBR30U100CT/FCT	Unit
Peak Repetitive Reverse Voltage	V_{RRM}	100	V
Working Peak Reverse Voltage	V_{RWM}		
DC Blocking Voltage	V_R		
Average Rectified Forward Current (Per Leg)	$I_F(AV)$	15	A
Rated VR) TC = 130°C (Per Device)		30	
Nonrepetitive Peak Surge Current (Surge applied at rated load conditions halfwave, single phase, 60 Hz)	I_{FSM}	200	A
Isolation Voltage (ITO-220AB Only) From terminal to heatsink t = 3 sec.	V_{AC}	1500	V

Single phase, half wave, 60Hz, resistive or inductive load. For capacitance load, derate current by 20%.

Thermal Characteristics (Per Leg)

Parameter	Symbol	Value	Unit
Typical Thermal Resistance	$R_{\theta JC}$	2.2	$^{\circ}\text{C/W}$
		4.0	
Operating and Storage Temperature Range	T_J, T_{STG}	-65 to +175	$^{\circ}\text{C}$

Electrical Characteristics (Per Leg) ($T_A = +25^{\circ}\text{C}$, unless otherwise specified.)

Parameter	Test conditions	Symbol	Typ	Max	Unit
Forward Voltage Drop	$I_F = 15\text{A}$	$V_F^{(1)}$		0.70	V
				0.65	
Leakage Current (Note 1)	$V_R = 100\text{V}$	$I_R^{(2)}$		0.5	mA
				25	

Notes: (1) Pulse test: 300us pulse width, 1% duty cycle;

(2) Pulse test: Pulse width $\leq 40\text{ms}$

Ratings And Characteristics Curves ($T_C = 25^{\circ}\text{C}$ unless otherwise noted)

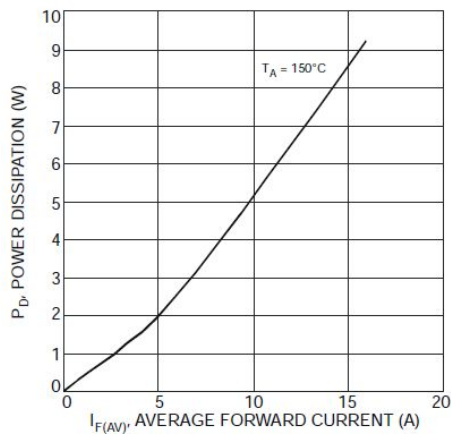


Figure 1 Forward Power Dissipation

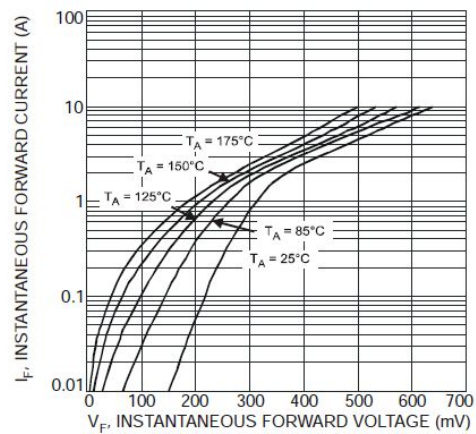


Figure 2. Typical Forward Characteristics

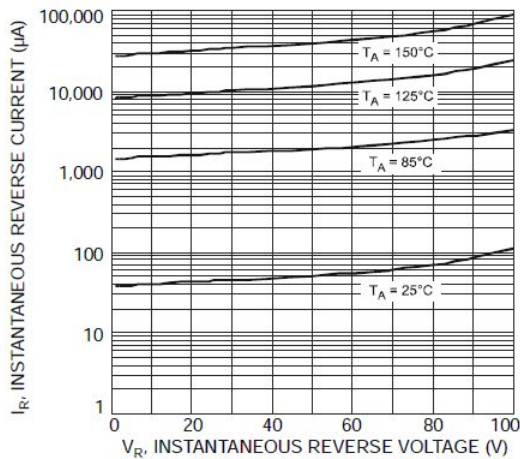


Figure 3. Typical Reverse Characteristics

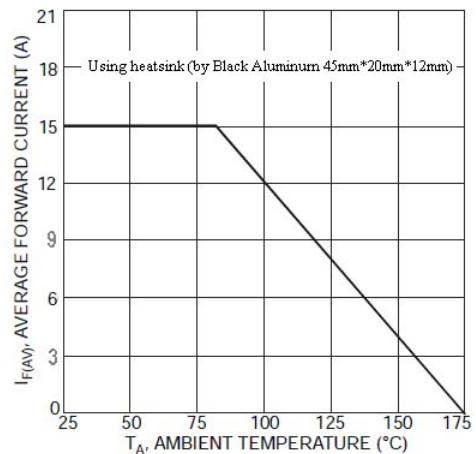


Figure 4. Forward Current Derating Curve


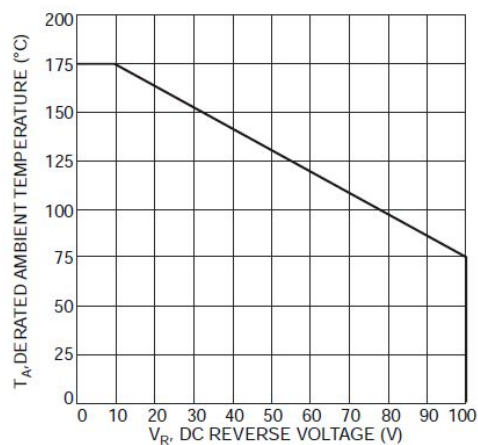


Figure 5. Operating Temperature Derating

Mechanical Dimensions

TO-220AB

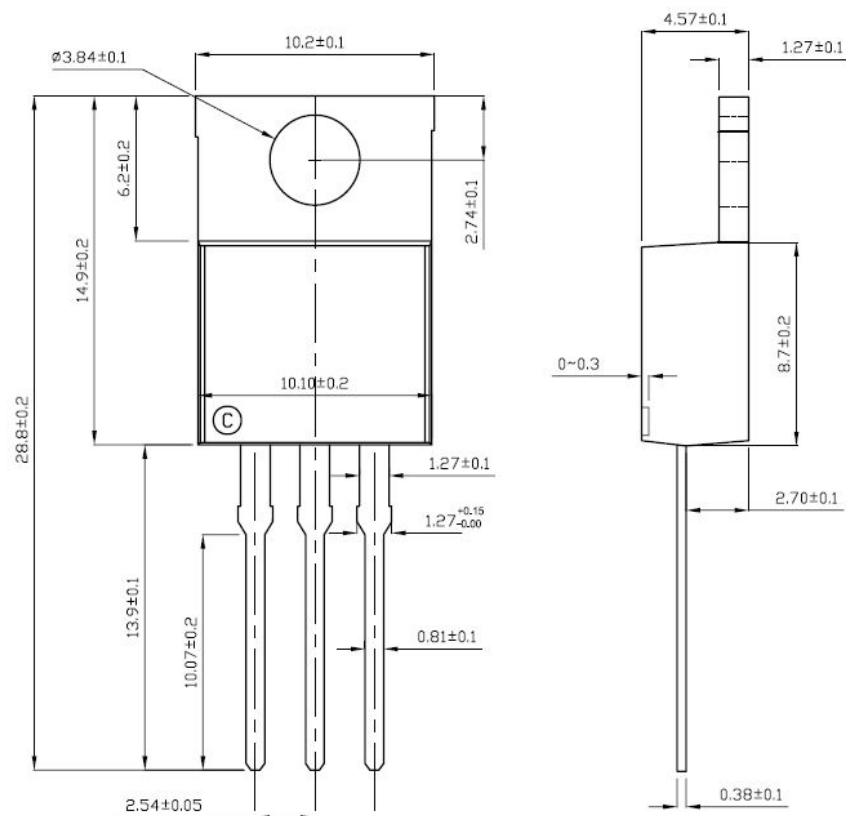

ITO-220AB

